

- 2 - 40.50/... ( )

Mix and Fill.



(4 ): 18 23 . \*  
: 2,5 - 3,5  
: 1,5 - 2,0  
: 130 / 2



(4 ): 18 23 . \*  
: 100 - 150  
: 0,23 - 0,28  
: 130 / 2

4 ( )



18 ( 4 ),  
-23 ( 4 ).



25.50 " ( 2 )  
-20-30 ).



+15 ( )



25.50.

- DIN EN 71-3 ( )
- DIN 68861 T1 B, C ( )
- DIN 68861 T1 B( )
- DIN 53160 ( )

( ) DINP ( )

20 / 10 / 2,5


11.4 621 627 04  
V 15 919 667 01

50-70 ( 4 )

12  
V 15 (10 - 20%)  
11.4  
5 : 1

( 23°C 65%)

24

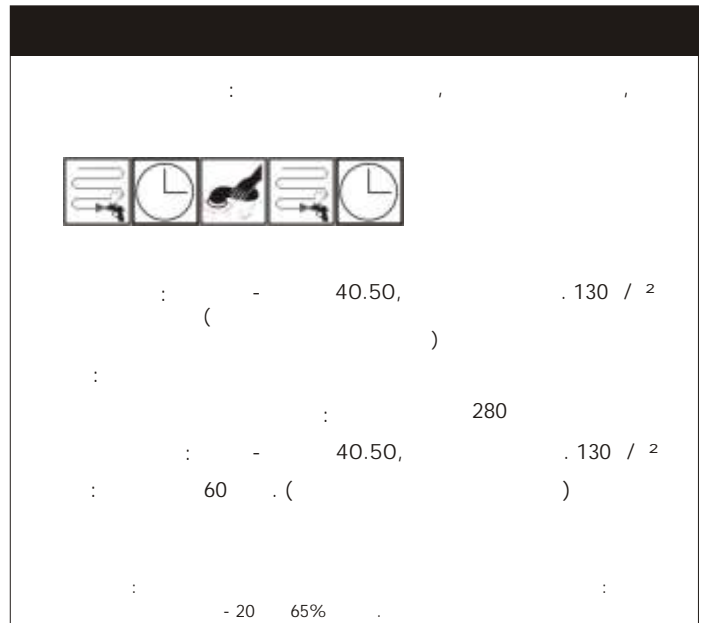

40.50, 130 / 2  
( )  
280  
40.50, 130 / 2  
60 ( )  
-20 65%